
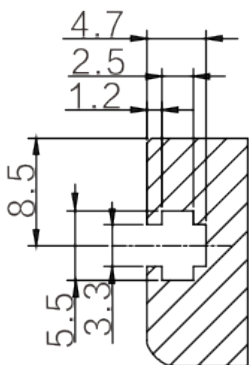


Pin1 -- 棕色/+
Pin2 -- 空 /NC
Pin3 -- 蓝色/-

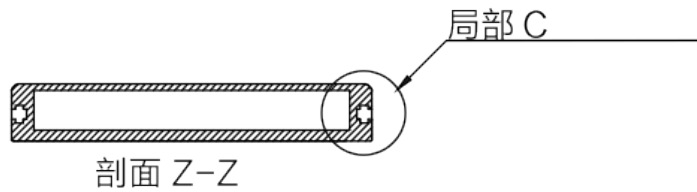

局部 C,
四面, M3螺母, 安装用

参数 型号	尺寸 (mm)						额定功率 (w)		估重 (g)
	A	B	C	D	E	F	R	W/G/B	
FQ2-27X27	27	27	41	41	32	18	1.1	2.8	53
FQ2-43X35	43	35	57	49	40	18	1.9	2.8	75
FQ2-51X51	51	51	65	65	56	18	4.2	4.4	100
FQ2-63X60	63	60	77	74	65	25	4.1	5.1	130
FQ2-83X75	83	75	97	89	80	50	5.5	5.2	180
FQ2-100X100	100	100	114	114	105	50	9.5	10.0	245
FQ2-140X105	140	105	154	119	110	80	13.8	13.9	335
FQ2-160X120	160	120	174	134	125	80	16.6	17.4	400
FQ2-200X50	200	50	214	64	55	80	9.9	20.0	410
FQ2-200X150	200	150	214	164	155	80	28.8	30.2	520
FQ2-224X170	224	170	238	184	175	80	30.2	33.7	600
FQ2-211X200	211	200	225	214	205	80	24.2	24.2	770

请对照左边标示的标注符号

产品安装尺寸图					设计					
输入电压	理论电耗功率				审核					
	红色 (R)	白/蓝/绿色 (WGB)	红外 (IR)	紫外 (UV)	估重	视角方向	比例	单位	名称	底部背光源
24V								mm	型号	FQ2系列

